

10.04.00

A

Patent Application
Docket No. 34650-00443USPT

IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

In re patent application of: Roozbeh Atarius, Håkan Eriksson, Torgny Palenius,
Christer Östberg, Torsten Carlsson, and Kjell Gustafsson

For: SEARCHING FOR SIGNALS IN A COMMUNICATIONS SYSTEM

BOX PATENT APPLICATION
Commissioner for Patents
Washington, D.C. 20231

CERTIFICATE OF MAILING BY EXPRESS MAIL

"EXPRESS MAIL" Mailing Label No. **EL524959161US**

Date of Deposit: **October 2, 2000**

I hereby certify that this paper or fee is being deposited with the U.S. Postal Service "Express Mail Post Office to Addressee" service under 37 CFR 1.10 on the date indicated above and is addressed to:
BOX PATENT APPLICATION, Commissioner for Patents,
Washington, D.C. 20231

Type or Print Name: Marcy Overstreet

Signature *Marcy Overstreet*

Sir:

PATENT APPLICATION TRANSMITTAL LETTER

Transmitted herewith for filing, please find the following:

- X Specification (including claims) and abstract of the above-referenced patent application (total of 46 pages)
- X Six (6) sheet(s) of drawing(s) (___ formal/ X informal) (Figs. 1-6).
- X Combined Declaration and Power of Attorney (Unexecuted).
- ___ No filing fee, Oath, or Declaration is enclosed pursuant to 37 C.F.R 1.53(d)
- ___ A verified statement claiming small entity status under 37 CFR 1.9 and 1.27.
- X Information Disclosure Statement with Reference AA and Form PTO-1449.
- X Other (specify): Acknowledgment postcard.

X The filing fee has been calculated as shown below:

	<u>NO. FILED</u>	<u>NO. EXTRA</u>	<u>RATE</u>	<u>FEE</u>
<u>BASIC FEE</u>				<u>\$710</u>
<u>TOTAL CLAIMS</u>	<u>29-20</u>	<u>9</u>	<u>\$18</u>	<u>162</u>
<u>INDEPENDENT CLAIMS</u>	<u>4-3</u>	<u>1</u>	<u>\$80</u>	<u>80</u>
<u>MULTIPLE DEPENDENT CLAIM(S) PRESENTED</u>			<u>\$270</u>	
<u>TOTAL FEES:</u> —				<u>\$952</u>
<u>Deduct one-half of fee for Small Entity</u>				
<u>ASSIGNMENT RECORDAL FEE</u>			<u>\$40</u>	<u>\$</u>
<u>TOTAL AMOUNT DUE:</u>				<u>\$952</u>

— Please charge my Deposit Account No. 10-0447 in the amount of \$_____.

X A check in the amount of \$952.00 for the Application Filing Fee is attached. Please charge any deficiency or credit any overpayment to Deposit Account No. 10-0447.

X The Commissioner is hereby authorized to charge payment of the following fees for filing or anytime during the pendency of this application or credit any overpayment to Deposit Account No. 10-0447.

X Any patent application processing fees under 37 CFR 1.17 and under 37 CFR 1.20(d).

— The issue fee set in 37 CFR 1.18 at or before mailing of the Notice of Allowance, pursuant to 37 CFR 1.311(b).

X Any filing fees under 37 CFR 1.16 including fees for presentation of extra claims.

Respectfully submitted,

Keith W. Saunders

Keith W. Saunders
Registration No. 41,462

Date: October 2, 2000
JENKENS & GILCHRIST, P.C.
3200 Fountain Place
1445 Ross Avenue
Dallas, Texas 75202-2799
214/855-4732 (Direct)
214/855-4300 (Fax)

U.S. Patent Application
Docket #34650-00443USPT
Ericsson Ref. P11265US

Inventors:

- (1) R. Atarius
- (2) H. Eriksson
- (3) T. Palenius
- (4) C. Östberg
- (5) T. Carlsson
- (6) K. Gustafsson

CERTIFICATE OF MAILING BY EXPRESS MAIL	
"EXPRESS MAIL"	
Mailing Label No. <i>EL52495916145</i>	
Date of Deposit <i>OCTOBER 23 2000</i>	
I hereby certify that this paper or fee is being deposited with the U.S. Postal Service "Express Mail Post Office to Addressee" service under 37 CFR 1.10 on the date indicated above and is addressed to:	
Box PATENT APPLICATION	
Commissioner for Patents	
Washington, D.C. 20231	
Type or Print Name	<i>MARION OVERSTREET</i>
Signature	<i>M. Overstreet</i>

SEARCHING FOR SIGNALS IN A COMMUNICATIONS SYSTEM

BACKGROUND OF THE INVENTION

Technical Field of the Invention

The present invention relates in general to the field of communications, and in particular, by way of example but not limitation, to tuning to signal path-rays in a wireless communications system such as a Code Division Multiple Access (CDMA) system.

Description of Related Art

Mobile wireless communication is becoming increasingly important for providing safety, convenience, improved productivity, and simple conversational pleasure to subscribers of wireless communications services. One prominent mobile wireless communication option is cellular communication. Cellular phones, for instance, can be found in cars, briefcases, purses, and even pockets. With the proliferation of cellular phone users and the types of services offered, new wireless system standards are being developed to meet these demands.

For example, CDMA, Wideband-CDMA (W-CDMA), etc. are being implemented to improve spectral efficiency and introduce new features. In CDMA or W-CDMA (jointly referred to as "CDMA" hereafter), signal fading is combated by combining multiple received diverse signal path-rays in a RAKE receiver. Locations (in time) of the signal path-rays are first found by using a searcher. Subsequently, these path-rays are combined by using a maximum ratio combiner (MRC). Searchers are conventionally implemented as one or

more matched filters and a peak detector. The signal path-rays are matched to a certain pilot sequence, which results in peaks that indicate the locations of the various path-rays. The peak detector detects these resulting peaks.

5 Realizing a searcher is a computationally complex endeavor; therefore, it is desirable to detect the path-rays only once. After detection, the path-rays are consequently tracked as long as possible by using a path-ray tracker. The tracking is continued until the quality of the received
10 signal reaches (e.g., falls) to a predetermined threshold. Thereafter, the tracking is ceased and a new search is initiated. The computational complexity of a searcher results from, at least in part, the number of delay candidates that the searcher must consider in order to locate
15 the path-rays. The greater the number of delay candidates, the greater the cost in terms of hardware, processing time, power consumption, silicon real estate, etc. Hence, there is a need for a means to reduce the total number of delay candidates that must be considered by the searcher when
20 locating the diverse signal path-rays.

SUMMARY OF THE INVENTION

09678165 "100200

The needs of the prior art are met by the method and system of the present invention. For example, as heretofore unrecognized, it would be beneficial to reduce the total number of delay candidates that must be considered by a searcher of a receiver when locating diverse signal path-rays. In fact, it would be beneficial if a searcher divided the matching process into coarse signal matching and fine signal matching to reduce the number of delay elements involved in computing the location of signal path-rays.

The present invention is related, in one embodiment, to searching for signal path-rays in a CDMA system. The invention is directed to conducting a primary coarse search for the signal path-rays to determine their general location(s) and thereafter to performing a secondary fine search to determine their precise location(s).

The method and system of the present invention is directed, in general, to simplifying the matched filters in a CDMA receiver. The matched filters are simplified by reducing the number of delay candidates that must be

addressed when searching for location(s) of path-rays of a
signal to be received. The simplification of the matched
filters is accomplished by implementing a two-stage signal
path-ray location searcher. A first coarse stage locates an
5 approximate location of a signal path-ray. A second finer
stage locates the signal path-ray more precisely. The
more-exact location(s) may subsequently be forwarded to a set
of rake fingers in a spread spectrum receiver.

In one embodiment, an analog received signal is
10 oversampled in an analog-to-digital conversion. In other
words, the analog signal is sampled more than once per chip.
This oversampled signal is then decimated to reduce the
number of entries in the digital signal. The decimated
signal is applied to matched filters, which may be composed
15 of at least one finite impulse response (FIR) filter. A peak
detector detects an approximate location from the output of
the FIR filter.

The oversampled signal is shifted responsive to the
determined approximate location(s). A code generator
20 generates a code corresponding to expected data to be
received. The shifted oversampled signal is correlated to

the generated code, and a comparator selects the more-exact location from the results of the set of correlations. In another embodiment, the generated code is shifted and then correlated to the oversampled signal. Again, a comparator
5 selects the more-exact location from the results of the set of correlations.

The technical advantages of the present invention include, but are not limited to the following. It should be understood that particular embodiments may not involve any,
10 much less all, of the following exemplary technical advantages.

An important technical advantage of the present invention is that it reduces the complexity of a searcher in a CDMA receiver by reducing the number of delay elements that
15 the searcher must use. This consequently reduces power consumption and decreases the amount of silicon space occupied by the searcher.

Another important technical advantage of the present invention is that it enables searching to be effectuated
20 using a two-stage scheme, thereby simplifying the complexity of computations associated with the first stage.

Yet another important technical advantage of the present invention is the ability to first detect path-rays with a coarse time resolution and subsequently determine the locations of the path-rays by tuning to them with a better resolution.

The above-described and other features of the present invention are explained in detail hereinafter with reference to the illustrative examples shown in the accompanying drawings. Those skilled in the art will appreciate that the described embodiments are provided for purposes of illustration and understanding and that numerous equivalent embodiments are contemplated herein.

BRIEF DESCRIPTION OF THE DRAWINGS

A more complete understanding of the method and system of the present invention may be had by reference to the following detailed description when taken in conjunction with the accompanying drawings wherein:

FIGURE 1 illustrates an exemplary section of a wireless communications system in accordance with the present invention;

FIGURE 2 illustrates exemplary transmission/reception apparatus for the wireless communications system of FIGURE 1 in accordance with the present invention;

FIGURE 3 illustrates an exemplary air interface format for an embodiment in accordance with the present invention;

FIGURE 4A illustrates signal path-ray detection for an exemplary embodiment in accordance with the present invention;

FIGURE 4B illustrates signal path-ray detection for another exemplary embodiment in accordance with the present invention;

FIGURE 5A illustrates an exemplary higher-level diagram of signal path-ray detection for the exemplary embodiments

of FIGURES 4A and 4B in accordance with the present invention;

FIGURE 5B illustrates another exemplary higher-level diagram of signal path-ray detection for the exemplary
5 embodiments of FIGURES 4A and 4B in accordance with the present invention; and

FIGURE 6 illustrates an exemplary method in flowchart form for detecting signal path-rays in two stages in accordance with the present invention.

In the following description, for purposes of explanation and not limitation, specific details are set forth, such as particular circuits, logic modules (implemented in, for example, software, hardware, firmware, etc.), techniques, etc. in order to provide a thorough understanding of the invention. However, it will be apparent to one of ordinary skill in the art that the present invention may be practiced in other embodiments that depart from these specific details. In other instances, detailed descriptions of well-known methods, devices, logical code (hardware, software, firmware, etc.), etc. are omitted so as not to obscure the description of the present invention with unnecessary detail.

15 Preferred embodiments of the present invention and its advantages are best understood by referring to FIGURES 1-6 of the drawings, like numerals being used for like and corresponding parts of the various drawings. It should be understood that the FIGURES reflect both the real (I) and the
20 complex (Q) portions of the overall signal value(s) $(I+jQ)$.

Aspects of the air interface for the International Mobile Telecommunications 2000 (IMT-2000), a so-called third generation standard, is used to describe an embodiment of the present invention. However, it should be understood that the principles of the present invention are applicable to other wireless (or wireline) communication standards (or systems), especially those that employ spread spectrum technology, such as those based on some type of Code Division Multiple Access (CDMA) scheme, such as Direct Sequence (DS) CDMA (e.g., W-CDMA, IS-95-A, etc.), Frequency Hopped (FH) CDMA, time-dodging CDMA, Frequency-Time Dodging (F-TD) CDMA, etc., all of which are generally referred to herein as CDMA.

Referring now to FIGURE 1, an exemplary section of a wireless communications system in accordance with the present invention is illustrated generally at 100. The (section of) wireless communications system 100 includes a base station transmit/receive antenna 105, a base station transmitter/receiver (i.e., a transceiver (TRX)) section 110, and multiple mobile stations 115 and 125. Although only two mobile stations 115 and 125 are shown in FIGURE 1, it should be understood that the wireless communications system 100 may

include more than two mobile stations. Also illustrated are
transmission 120 (from the mobile station 115) and
transmission 130 (from the mobile station 125). As is known
in the art, reflections, delays, etc. cause multiple signals
5 (e.g., transmission signals 130A, 130B, and 130C) of a
transmission (e.g., the transmission 130) to be received by
the base station transmit/receive antenna 105 and
subsequently processed by the base station TRX section 110.

Referring now to FIGURE 2, exemplary
10 transmission/reception apparatus for the wireless
communications system of FIGURE 1 in accordance with the
present invention is illustrated generally at 200. An
information-carrying signal 205 is input to a spreader 210,
which spreads the signal 205 over a wide frequency range.
15 The spread signal is modulated at a modulator 215 and
subsequently transmitted from an antenna 220. The antenna
220 may be, for example, an antenna of one of the mobile
stations 115 and 125. The transmission 225 is received (in
several different signals (e.g., signal path-rays) that
20 arrive at varying times) at an antenna 230. The antenna 230
may be, for example, the base station transmit/receive

antenna 105. It should be noted, however, that the
(receiving) antenna 230 may correspond to a mobile station
and that the (transmitting) antenna 220 may correspond to a
base station in accordance with the principles of the present
5 invention. Thus, the two-stage searching principles of the
present invention may also be implemented in conjunction with
a receiver of a mobile station, for example.

Continuing now with reference to FIGURE 2, the antenna
230 receives the transmission 225, which may include multiple
10 signals. The transmission 225 is processed by the radio
frequency (RF) part 235, which forwards a signal 240 to a
rake receiver 245. The rake receiver 245 combines the
multiple signals to achieve an improved signal 280; the
improved signal 280 is thereafter forwarded to post
15 processing 290. The rake receiver 245 includes rake fingers
255 and a combiner 275. As part of, or perhaps only
associated with, the rake receiver 245 are a searcher 250 and
a path tracker 260. The searcher 250, the rake fingers 255,
and the path tracker 260 receive as input(s) the signal(s)
20 240, which include the multiple signals of transmission 225.

Referring now to FIGURE 3, an exemplary air interface format for an embodiment in accordance with the present invention is illustrated generally at 300. In CDMA systems data is segmented into portions with predetermined durations

as specified by the given CDMA standard. These portions in turn are segmented into smaller and smaller parts until the smallest part, the chip, is reached. Specifically, the segmentation of information in the Broad Cast CHannel (BCCH) according to the IMT-2000 standard, which is a W-CDMA standard, is illustrated at 300. A super frame 305 has a duration of 720 ms and is divided into seventy-two (72) frames 310. Each frame 310 is segmented into fifteen (15) slots 315, while each slot 315 is further segmented into ten (10) symbols 320. Ultimately, the symbols 320 are each composed of two hundred and fifty-six (256) chips 325.

Radio waves propagate a calculable distance during each chip depending on the duration of the chip. For example, radio waves propagate approximately 78.0 m in a duration corresponding to one chip 325 under the W-CDMA IMT2000 standard. In the W-CDMA IMT2000 standard, one chip 325 duration is defined to be $0.26 \mu\text{s}$ long. Thus, $3 \cdot 10^8 \text{ m/s} \times 0.26 \cdot 10^{-6} \text{ s} = 78.0 \text{ m}$, where the quantity $3 \cdot 10^8 \text{ m/s}$ equates to the speed of the radio waves. Within such a distance as 78.0 m, several path-rays may arrive at a CDMA receiver. Consequently, the received data is typically digitized by

oversampling the chips in order to increase the resolution for the detection of the arrival times of the path-rays. Although the oversampling enhances the performance of the searcher, it also unfortunately increases the complexity thereof because the matched filters must consequently address a greater number of delay elements as a result of the oversampling. This complexity is disadvantageous to the extent it increases hardware requirements and/or processing time.

10 Referring now to FIGURE 4A, signal path-ray detection for an exemplary embodiment in accordance with the present invention is illustrated generally at 250A. The searcher 250A detects signal path-rays when the undecimated received data is shifted and correlated to the generated code.

15 Referring now to FIGURE 4B, signal path-ray detection for another exemplary embodiment in accordance with the present invention is illustrated generally at 250B. The searcher 250B detects signal path-rays when the generated code is shifted and correlated to the undecimated received data.

20 As noted above, in order to increase the resolution for the detection of the path-rays' arrival times in a CDMA

05678165 "1003000

system, the received data is preferably oversampled several (e.g., at least more than one) times per chip. The oversampling rate may be defined as the number of times per chip that a received signal is sampled. This oversampling causes a need for increased complexity of the matched filter(s) because more delay elements are required for the implementation. In accordance with the principles of the present invention, however, this increased complexity is circumvented (e.g., reduced) by dividing the matching process/device into two (2) stages: coarse signal matching (denoted "Stage 1") and fine signal matching (denoted "Stage 2").

Continuing now with the searchers 250A and 250B of FIGURES 4A and 4B, respectively, the coarse signal matching ("Stage 1") is described. One purpose of the coarse signal matching is to locate the signal path-rays approximately. First, however, the incoming signal transmission(s) 225 (of FIGURE 2) are converted from analog-to-digital using an A/D converter 405 by oversampling several times per chip. This A/D converter 405 may, for example, be part of the RF part 235, the rake receiver 245, or some other part (not shown).

The matched filters 420 may employ at least one FIR filter 425 to locate the signal path-rays approximately. Alternatively, it could, for example, employ a bank of correlators, etc. The decimated signal 415 (e.g., instead of the (digital) signal 240) is provided to the FIR filter 425 to reduce the total number of delay elements to be addressed by the FIR filter 425. The approximate location of the signal path-rays may be determined by applying a peak detector 427 to the output of the matched filters 420. The matched filters 420 of the coarse signal matching produce a

detected approximate location 460 (e.g., from the output of the peak detector 427).

The decimation factor for the decimation part 410 is preferably equal to or less than the oversampling rate of the A/D converter 405. If the decimation factor is less than the oversampling rate, then the FIR matched filters are still able to detect the signal path-rays with a resolution that is higher than the chip resolution. If, on the other hand, the decimation factor is equal to or larger than the oversampling rate, the filter detects the signal path-rays with a resolution that is equal to or less than, respectively, the chip resolution.

Continuing now with the searchers 250A and 250B of FIGURES 4A and 4B, respectively, the fine signal matching ("Stage 2") is described. The fine signal matching is performed using the approximate location(s) of the signal path-rays detected by the coarse signal matching. The approximate location(s) is (are) provided as one or more delay candidates (as represented by "D") from the coarse signal matching. A code generator generates a pattern of the expected data at these approximate location(s), and this

generated code pattern is correlated to the undecimated
received data having the (over)sampled resolution. In one
exemplary embodiment (e.g., as illustrated in the searcher
250A of FIGURE 4A), the exact location(s) of the signal path-
5 rays are detectable by shifting the undecimated received data
having the (over)sampled resolution and then correlating to
the generated code pattern. The exact location of the signal
path-rays is determinable by comparing the resulting
correlation values. In another exemplary embodiment (e.g.,
10 as illustrated in the searcher 250B of FIGURE 4B), the exact
location(s) of the signal path-rays are detectable by
shifting the generated code pattern and then correlating to
the undecimated received data having the (over)sampled
resolution. The exact location of the signal path-rays is
15 determinable by comparing the resulting correlation values,
the selected one(s) of which may be forwarded as output(s).

Continuing now with FIGURES 4A and 4B, the fine signal
matching ("Stage 2") is performed using the detected
approximate location(s) 460 (e.g., the delay candidate(s)
20 "D") of the signal path-rays received from the coarse signal
matching ("Stage 1"). A code generator 435 generates a

pattern of the expected data as generated code data 440.
With reference now only to FIGURE 4A, the detected
approximate location(s) 460 ("D") and the (over)sampled
signal 240 are applied to shifters 430(D-M/C)... 430(D)...
5 430(D+M/C), which delay (e.g., by shifting) the (over)sampled
signal 240 from "-M/C" to "+M/C" units. The unit "C", as
explained further hereinbelow with reference to Tables 1-3,
relates to the (sub)chip resolution. More specifically, in
certain embodiment(s), "C" is proportional to the inverse of
10 the (sub)chip resolution. For example, if a particular
embodiment operates on quarter chip resolution, then "C" is
equal to four (4) in that particular embodiment. The
shifters 430(D-M/C)... 430(D)... 430(D+M/C) produce as output
the shifted (over)sampled signals 400(D-M/C)... 400(D)...
15 400(D+M/C). The shifted (over)sampled signals 400(D-M/C)...
400(D)... 400(D+M/C) and the generated code data 440 are
correlated in the correlation elements 445. With reference
now only to FIGURE 4B, the detected approximate location(s)
460 ("D") and the generated code data 440 are applied to
20 shifters 430(D-M/C)... 430(D)... 430(D+M/C), which delay
(e.g., by shifting) the generated code data 440 from "-M/C"

to "+M/C" units. The shifters 430(D-M/C)... 430(D)...
430(D+M/C) produce as output the shifted generated code data
460(D-M/C)... 460(D)... 460(D+M/C). The shifted generated
code data 460(D-M/C)... 460(D)... 460(D+M/C) and the
5 (over)sampled signal 240 are correlated in the correlation
elements 445.

Continuing now jointly with the searchers 250A and 250B
of FIGURES 4A and 4B, respectively, the values to be
correlated (e.g., the shifted (over)sampled signals 400(D-
10 M/C)... 400(D)... 400(D+M/C) and the generated code data 440
in the searcher 250A, and the shifted generated code data
460(D-M/C)... 460(D)... 460(D+M/C) and the (over)sampled
signal 240 in the searcher 250B) are applied to the
correlation elements 445. Specifically, associated with each
15 one of the shifters 430(D-M/C)... 430(D)... 430(D+M/C) is a
mixing detector 445(D-M/C)'... 445(D)'... 445(D+M/C)' (e.g.,
which may be a multiplying mixer, etc.) that receives the
values to be correlated. Correlation is accomplished by
applying the output(s) of the mixing detectors 445(D-M/C)'...
20 445(D)'... 445(D+M/C)' to a corresponding set of (i) coherent
integrators 445(D-M/C)''... 445(D)''... 445(D+M/C)'' (e.g.,

each of which may be a low-pass or bandpass quenchable narrow-band filter, etc.), (ii) magnitude-taking parts 445(D-M/C) ' ' '... 445(D) ' ' '... 445(D+M/C) ' ' ', and (iii) non-coherent integrators 445(D-M/C) ' ' ' '... 445(D) ' ' ' '... 445(D+M/C) ' ' ' '.

5 The magnitude-taking parts 445(D-M/C) ' ' '... 445(D) ' ' '... 445(D+M/C) ' ' ' take the magnitude of the signal if $n=1$, the magnitude squared if $n=2$, etc. The magnitude-taking part is used to enable non-coherent integration by taking away the phase of the signal. Consequently, robust integration may
10 be achieved because phase variations in the channel do not affect the result. This protection from phase variations can be accomplished, for example, by squaring the signal (when $n=2$) or by merely taking the magnitude (when $n=1$). The latter (i.e., magnitude-taking) is advantageously cheaper to
15 implement in terms of silicon area and power consumption while the former (i.e., squaring) advantageously provides slightly better performance. The correlation values 450(D-M/C) ... 450(D) ... 450(D+M/C) are output from the non-coherent integrators 445(D-M/C) ' ' ' '... 445(D) ' ' ' '... 445(D+M/C) ' ' ' '.

20 A comparison part 455 selects the highest correlation value from among the correlation values 450(D-M/C) ... 450(D) ...

450(D+M/C) and forwards it as a more-exact, fine location output on line 265. The comparison part 455 may select the correlation value from among the correlation values 450(D-M/C)... 450(D)... 450(D+M/C) that has the largest value.

5 Alternatively, a more-complicated scheme, for example, may be employed to choose the best candidate.

Referring now to FIGURE 5A, an exemplary higher-level diagram of signal path-ray detection for the exemplary embodiments of FIGURES 4A and 4B in accordance with the present invention is illustrated generally at 500. The searcher 500 operates in parallel. Referring now to FIGURE 5B, another exemplary higher-level diagram of signal path-ray detection for the exemplary embodiments of FIGURES 4A and 4B in accordance with the present invention is illustrated generally at 550. The searcher 550 operates in series. Each of the searchers 500 and 550 begin with "Stage 1" (as identified above with reference to FIGURES 4A and 4B) blocks 505 and 555, respectively. Each of the searchers 500 and 550 include one or more "Stage 2"s. It should be noted that "Stage 2" for the searchers 500 and 550 need not include the comparison parts 455 of the searchers 250A and 250B (of

FIGURES 4A and 4B, respectively) because their function may be accomplished by the comparison parts 515 and 570 of the searchers 500 and 550, respectively.

"Stage 1" blocks 505 and 555 produce a number of delay candidates $D_1 \dots D_k$. The value of "k" may be, for example, five (5) or six (6). In the searcher 500, the delay candidates $D_1 \dots D_k$ are produced by the "Stage 1" block 505 approximately simultaneously and sent as a vector to the "Stage 2" (as identified above with reference to FIGURES 4A and 4B) blocks 510. The "Stage 2" blocks 510(1) ... 510(k) each produce an output for a total of "k" outputs that are subsequently compared in the comparison part 515, which also receives as input the delay candidates $D_1 \dots D_k$. In the searcher 550, the delay candidates $D_1 \dots D_k$ are produced by the "Stage 1" block 555 approximately simultaneously and sent as a vector to the "Stage 2" block 560. The "Stage 2" block 560 is operated repeatedly (e.g., in serial) "k" times. The serially-produced "k" outputs of the "Stage 2" block 560 are placed in a memory 565 in locations 1 ... k, respectively. Because each of these "k" outputs actually include "2M+1" (sub)outputs, each memory location 1 ... k of the memory 565

may contain " $2M+1$ " memory slots. These " k " outputs (or, more precisely, these " $k * (2M+1)$ " outputs) are then passed in parallel to the comparison part 570, which also receives as input the delay candidates $D_1 \dots D_k$.

5 With respect to both searchers 500 and 550, these " k " (or " $k * (2M+1)$ ") outputs from either the multiple "Stage 2" blocks 510(1)... 510(k) or the single "Stage 2" block 560 (e.g., via the memory 565) are compared in comparison parts 515 and 570, respectively. The comparison parts 515 and 570
10 may, for example, select the " L " largest of the " k " (or " $k * (2M+1)$ ") outputs that correspond to delay candidates that are the most significant path-rays by, e.g., studying their amplitudes, especially those that are more than one-half chip apart, as is explained hereinbelow in greater detail with
15 reference to Table 3. These selected " L " outputs may be employed in a rake receiver (e.g., the rake receiver 245 of FIGURE 2) in order to combine the corresponding signal-path rays using, for example, MRC.

 An exemplary comparison for the comparison parts 515 and
20 570 is now described with reference to Tables 1-3 for explanatory, but not limiting, purposes. Assume that the

intention is to locate two peaks (e.g., "L=2") using two (2)
"Stage 2" blocks (e.g., two "Stage 2" blocks 510(1) and
510(2) or the single "Stage 2" block 560 operated twice) with
each "Stage 2" block functioning at a quarter chip resolution
5 (e.g., "C=4"). Considering the case when "M=2" (and
therefore each "Stage 2" has "2M+1" outputs), the number of
correlators and thus outputs per stage is equal to five (5).
In the Table 1 below, the output of a preceding "Stage 1"
block 505 or 555 is given as [1,2]. The consequential
10 outputs of the two "Stage 2" blocks are therefore:

	Stage 2:1	Stage 2:2
Correlator 1	$D1-2/C=0.5$	$D2-2/C=1.5$
Correlator 2	$D1-1/C=0.75$	$D2-1/C=1.75$
Correlator 3	$D1=1.0$	$D2=2.0$
Correlator 4	$D1+1/C=1.25$	$D2+1/C=2.25$
15 Correlator 5	$D1+2/C=1.5$	$D2+2/C=2.5$

Table 1 (L=2;M=2;C=4;First Stage Output [1,2]).

In another example, consider that the output of the
" j^{th} " correlator of the " i^{th} " "Stage 2" block is denoted as
OUT(i,j) as in Table 2 below:

	OUT(1,j)	OUT(2,j)
Correlator 1	140	120
Correlator 2	121	80
Correlator 3	70	30
Correlator 4	60	20
Correlator 5	120	10

Table 2 (OUT("i"th "Stage 2" block , "j"th correlator)).

The final delay values to be utilized by the rake receiver may be selected by observing and analyzing these exemplary values. In this example, assume that the objective is to select the two (2) (e.g., L=2) best delay candidates. There are many possible approaches to selecting these two (2) best delay candidates. A straightforward approach is to first determine the delay value having the largest output, which is the OUT(1,1) delay candidate having a delay of 0.50 chip. Thereafter, all the outputs closer to half a chip are set equal to zero. The Table 3 below reflects this setting to zero:

OUT(1,1)=140	OUT(2,1)=120
OUT(1,2)=0	OUT(2,2)=80
OUT(1,3)=0	OUT(2,3)=30
OUT(1,4)=60	OUT(2,4)=20
OUT(1,5)=120	OUT(2,5)=10

Table 3 (OUT("i"th "Stage 2" block, "j"th correlator)).

From the values in Table 3, the next largest output value is selected, which is the OUT(1,5) and OUT(2,1) delay candidates, where the delay is equal to 1.5 chips. This process may be repeated if more delay candidates are to be determined. In this example, the two "Stage 2" stages overlap at delays of 1.5 chips. It should be noted that this overlap may possibly be avoided by carefully adjusting the delays when they are provided to the "Stage 2" stages.

It should be understood that the elements of FIGURES 2 and 4-5 need not be discrete physical devices. They may alternatively be, for example, logic modules in which the various functions are performed by separate entities, overlapping entities, some combination thereof, etc. Furthermore, they may also be composed of one or more software programs or routines running on a general purpose

microprocessor, such as a digital signal processor (DSP), or
a specialized processing unit. Other possibilities for
realizing the principles of the present invention will become
apparent to those of ordinary skill in the art after reading
5 and understanding this disclosure, especially with regard to
FIGURES 2 and 4-6 and the text related thereto.

Referring now to FIGURE 6, an exemplary method in
flowchart form for detecting signal path-rays in two stages
in accordance with the present invention is illustrated
10 generally at 600. The flowchart 600 begins with the
reception of a signal (block 605). The signal may be
converted from analog-to-digital, preferably by oversampling
multiple times per chip. The coarse signal matching stage
(block 610) follows. As part of the coarse signal matching
15 stage (block 610), the (over)sampled signal is decimated
(block 615). The decimated signal may then be applied to a
filter (block 620). The filter may be, for example, a FIR
filter that is part of a set of matched filters. The
filtered signal may subsequently be applied to a detector to
20 determine approximate location(s) of the signal path-rays
(block 625). The detector may, for example, be a peak

detector. It should be understood that although the present invention is directed to dividing the searching process/device into two stages, at least portions of the coarse and fine signal matching stages may occur in parallel.

5 The fine signal matching stage (block 630) may utilize the approximate location(s) as a guideline for shifting at least one of the values to be correlated. In one exemplary embodiment, the undecimated (over)sampled signal may be shifted (block 635), and the shifted undecimated
10 (over)sampled signal may be correlated to generated code (block 645). The correlation results may then be compared, and the highest correlation value may be selected in order to determine the fine location(s) of the signal path-rays (block 655). In another exemplary embodiment, the generated
15 code may be shifted (block 640), and the shifted generated code may be correlated to the undecimated (over)sampled signal (block 650). The correlation results may then be compared, and the highest correlation value may be selected in order to determine the fine location(s) of the signal
20 path-rays (block 660). After determining the fine location(s) of the signal path-rays as part of the fine

signal matching stage (block 630), the fine location(s) of the signal path-rays may be provided to rake fingers (block 665) to further process the received signal.

Although preferred embodiment(s) of the method and system of the present invention have been illustrated in the accompanying Drawings and described in the foregoing Detailed Description, it will be understood that the present invention is not limited to the embodiment(s) disclosed, but is capable of numerous rearrangements, modifications, and substitutions without departing from the spirit and scope of the present invention as set forth and defined by the following claims.

WHAT IS CLAIMED IS:

- 1 1. A method for locating signal path-rays in a
2 communications system, comprising the steps of:
3 receiving a signal;
4 decimating said signal to produce a decimated
5 signal;
6 processing said decimated signal to produce at
7 least one first location; and
8 processing said signal and a generated code using
9 said at least one first location to produce at least one
10 second location.

00000169.00000

1 2. The method according to Claim 1, wherein:
2 said step of processing said decimated signal to
3 produce at least one first location comprises the step of
4 processing said decimated signal to produce said at least one
5 first location having a first precision;
6 said step of processing said signal and a generated
7 code using said at least one first location to produce at
8 least one second location comprises the step of processing
9 said signal and said generated code using said at least one
10 first location having said first precision to produce said
11 at least one second location having a second precision; and
12 said first precision being less precise than said
13 second precision.

1 3. The method according to Claim 1, further comprising
2 the step of:
3 sampling said signal in an analog-to-digital
4 conversion a plurality of times per chip prior to said step
5 of decimating; and
6 wherein said signal in said step of decimating
7 comprises the sampled signal.

1 4. The method according to Claim 1, wherein said
2 communications system comprises a wireless Code Division
3 Multiple Access (CDMA) communications system.

1 5. The method according to Claim 1, wherein said step
2 of processing said decimated signal to produce at least one
3 first location comprises the step of applying said decimated
4 signal to at least one filter to produce said at least one
5 first location.

1 6. The method according to Claim 5, wherein said step
2 of applying said decimated signal to at least one filter to
3 produce said at least one first location comprises the step
4 of applying said decimated signal to at least one finite
5 impulse response (FIR) filter of at least one matched filter.

1 7. The method according to Claim 5, wherein said step
2 of processing said decimated signal to produce at least one
3 first location further comprises the step of applying an
4 output of said at least one filter to a peak detector to
5 determine said at least one first location.

1 8. The method according to Claim 1, wherein said step
2 of processing said signal and a generated code using said at
3 least one first location to produce at least one second
4 location comprises the step of shifting one of said signal
5 and said generated code responsive to said at least one first
6 location to create a shifted variable and a non-shifted
7 variable.

1 9. The method according to Claim 8, wherein said step
2 of processing said signal and a generated code using said at
3 least one first location to produce at least one second
4 location further comprises the step of correlating said
5 shifted variable with said non-shifted variable to produce
6 a plurality of correlation values.

1 10. The method according to Claim 9, wherein said step
2 of processing said signal and a generated code using said at
3 least one first location to produce at least one second
4 location further comprises the step of comparing said
5 plurality of correlation values to select said at least one
6 second location.

1 11. The method according to Claim 9, wherein said
2 shifted variable comprises said signal and said non-shifted
3 variable comprises said generated code.

1 12. The method according to Claim 9, wherein said
2 shifted variable comprises said generated code and said non-
3 shifted variable comprises said signal.

1 13. The method according to Claim 1, further comprising
2 the step of forwarding said at least one second location to
3 rake fingers to enable subsequent maximal ratio combining
4 (MRC) of said signal.

1 14. A receiver system for locating signal path-rays in
2 a communications system, comprising:

3 a decimation part that decimates a signal in
4 accordance with a decimation factor;

5 at least one filter connected to said decimation
6 part, said at least one filter involved in determining a
7 first location of said signal;

8 a code generator part, said code generator part
9 adapted to generate at least one code pattern;

10 at least one shifter connected to said at least one
11 filter to receive said first location; and

12 at least one correlator, said at least one
13 correlator correlating a version of said signal to a version
14 of said at least one code pattern.

1 15. The receiver system according to Claim 14, wherein
2 said shifter shifts said signal, said version of said signal
3 is a shifted version of said signal, and said version of said
4 at least one code pattern is an un-shifted version of said
5 at least one code pattern.

1 16. The receiver system according to Claim 14, wherein
2 said shifter shifts said at least one code pattern, said
3 version of said signal is an un-shifted version of said
4 signal, and said version of said at least one code pattern
5 is a shifted version of said at least one code pattern.

1 17. The receiver system according to Claim 14, further
2 comprising an analog-to-digital converter, said analog-to-
3 digital converter converting said signal to a digital,
4 sampled signal prior to said decimation part decimating said
5 signal.

1 18. The receiver system according to Claim 17, wherein
2 a sampling rate of said analog-to-digital converter is such
3 that an analog version of said signal is sampled a plurality
4 of times per chip.

1 19. The receiver system according to Claim 18, wherein
2 said sampling rate and said decimation factor are
3 determinative, at least in part, of a precision of said first
4 location.

1 20. The receiver system according to Claim 14, further
2 comprising a peak detector; and

3 wherein said at least one filter comprises a
4 plurality of matched filters, said plurality of matched
5 filters include at least one finite impulse response (FIR)
6 filter, an input of said peak detector is comprised of an
7 output of said at least one FIR filter, and said first
8 location is comprised of an output of said peak detector.

1 21. The receiver system according to Claim 14, wherein
2 said at least one correlator comprises a plurality of
3 correlators, each of said plurality of correlators including
4 a multiplying mixer and an integrator.

09678165-100000

3 wherein said at least one correlator comprises a
4 plurality of correlators, each of said plurality of
5 correlators outputs a correlation value, said comparison part
6 selects a highest value from among the output correlation
7 values, and a second location output from said comparison
8 part is comprised of said highest value or a related value.

1 23. The receiver system according to Claim 22, wherein
2 a first precision of said first location is less exact than
3 a second precision of said second location.

1 24. The receiver system according to Claim 14, wherein
2 said communications system comprises a wireless Code Division
3 Multiple Access (CDMA) communications system.

1 25. The receiver system according to Claim 14, further
2 comprising a comparison part and a plurality of rake fingers,
3 said comparison part receiving at least one output from said
4 at least one correlator and providing a second location to
5 at least one of said plurality of rake fingers.

002001"59137960

1 26. A method for searching for signal path-rays in a
2 Code Division Multiple Access (CDMA) communications system,
3 comprising the steps of:
4 receiving a signal;
5 determining a coarse location of said signal;
6 determining a fine location of said signal based,
7 at least in part, on said coarse location; and
8 providing said fine location to rake fingers.

1 27. The method according to Claim 26, wherein said step
2 of determining a coarse location of said signal comprises the
3 step of decimating said signal, said signal having been
4 oversampled.

1 28. The method according to Claim 26, wherein said step
2 of determining a fine location of said signal based, at least
3 in part, on said coarse location comprises the steps of:
4 generating a code pattern;
5 shifting responsive to said coarse location;
6 correlating said code pattern to said signal, at
7 least one of said code pattern and said signal having been
8 shifted in said step of shifting; and
9 selecting said fine location in response to said
10 step of correlating.

1 29. A method for locating at least one signal path-ray
2 in a spread spectrum system, comprising the steps of:
3 receiving a spread spectrum signal; and
4 determining a location of said spread spectrum
5 signal using, at least partly, a decimated version of said
6 spread spectrum signal.

002007 "59187950

SEARCHING FOR SIGNALS IN A COMMUNICATIONS SYSTEM

ABSTRACT OF THE DISCLOSURE

09076169-100000

A method and system enables matched filters of a CDMA system to be simplified using a two stage search. A course stage and a fine stage jointly produce the location(s) of received signal path-rays. In a first stage, an oversampled
5 digital signal is decimated, and the decimated signal is applied to a matched filter to eventually produce an approximate location. In a second stage, the oversampled signal is shifted based on the determined approximate location and then correlated to a generated code, and a
10 more-exact location is selected from the outputs of the correlations. Alternatively, a shifted version of the generated code is correlated to the oversampled signal, and the more-exact location is selected from the outputs of those correlations.

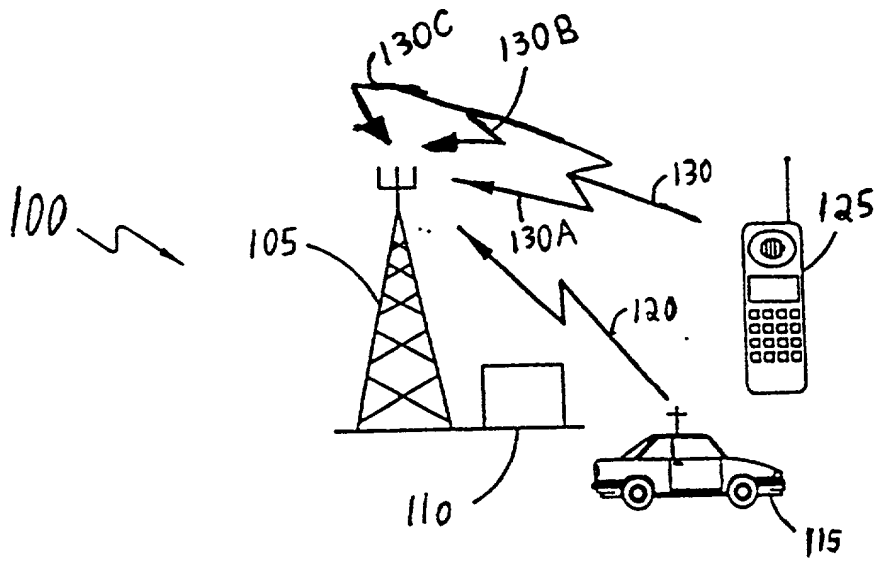


FIG. 1

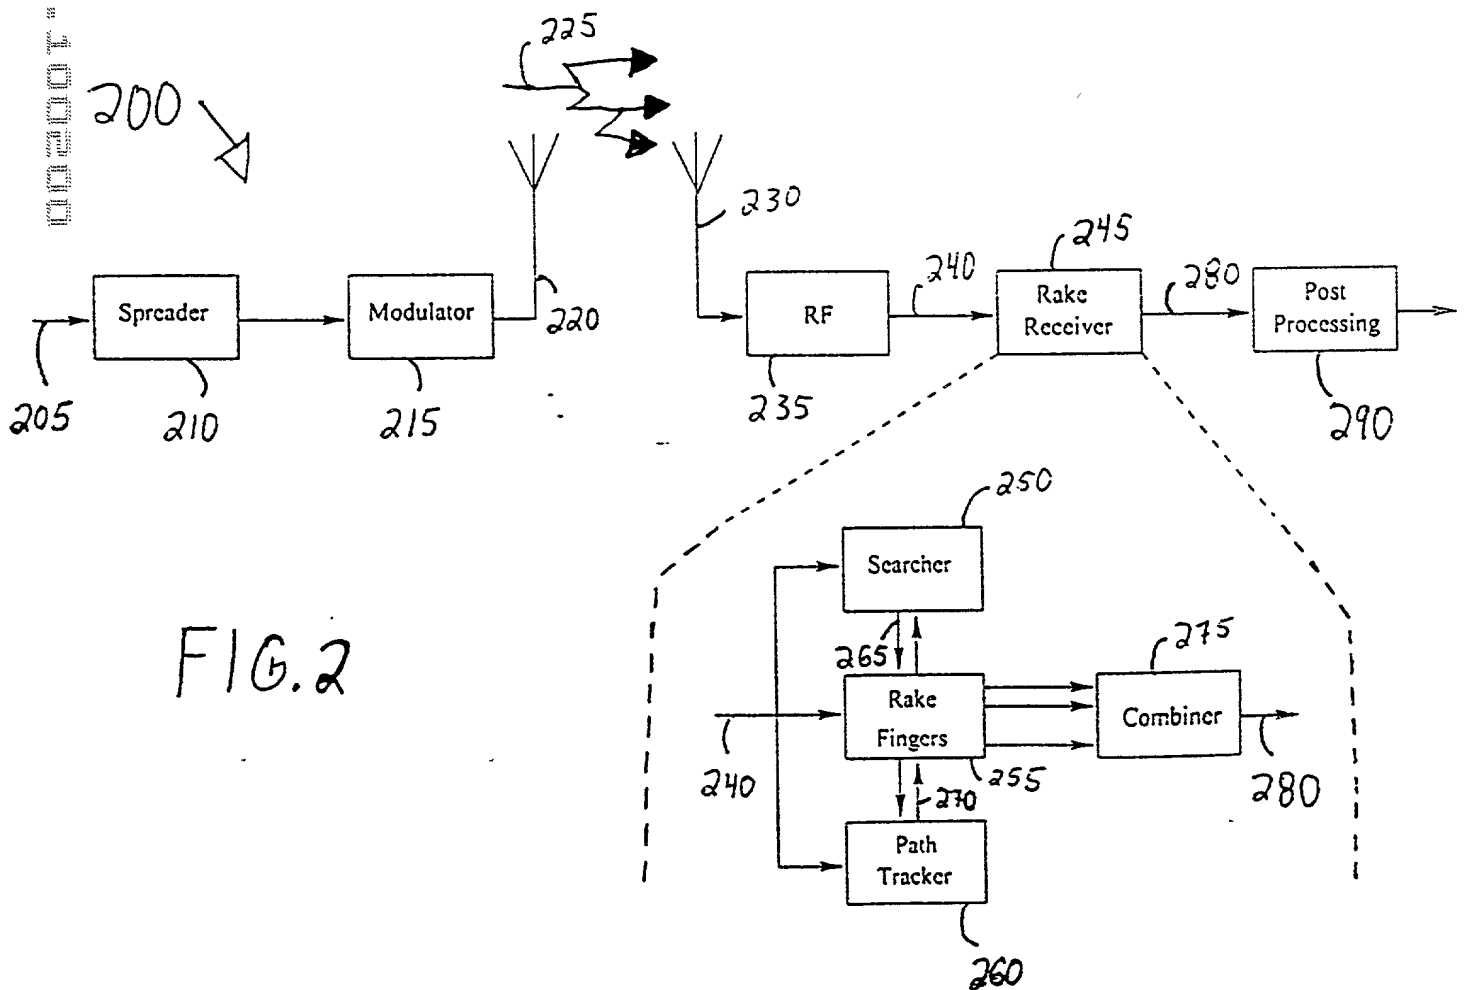


FIG. 2

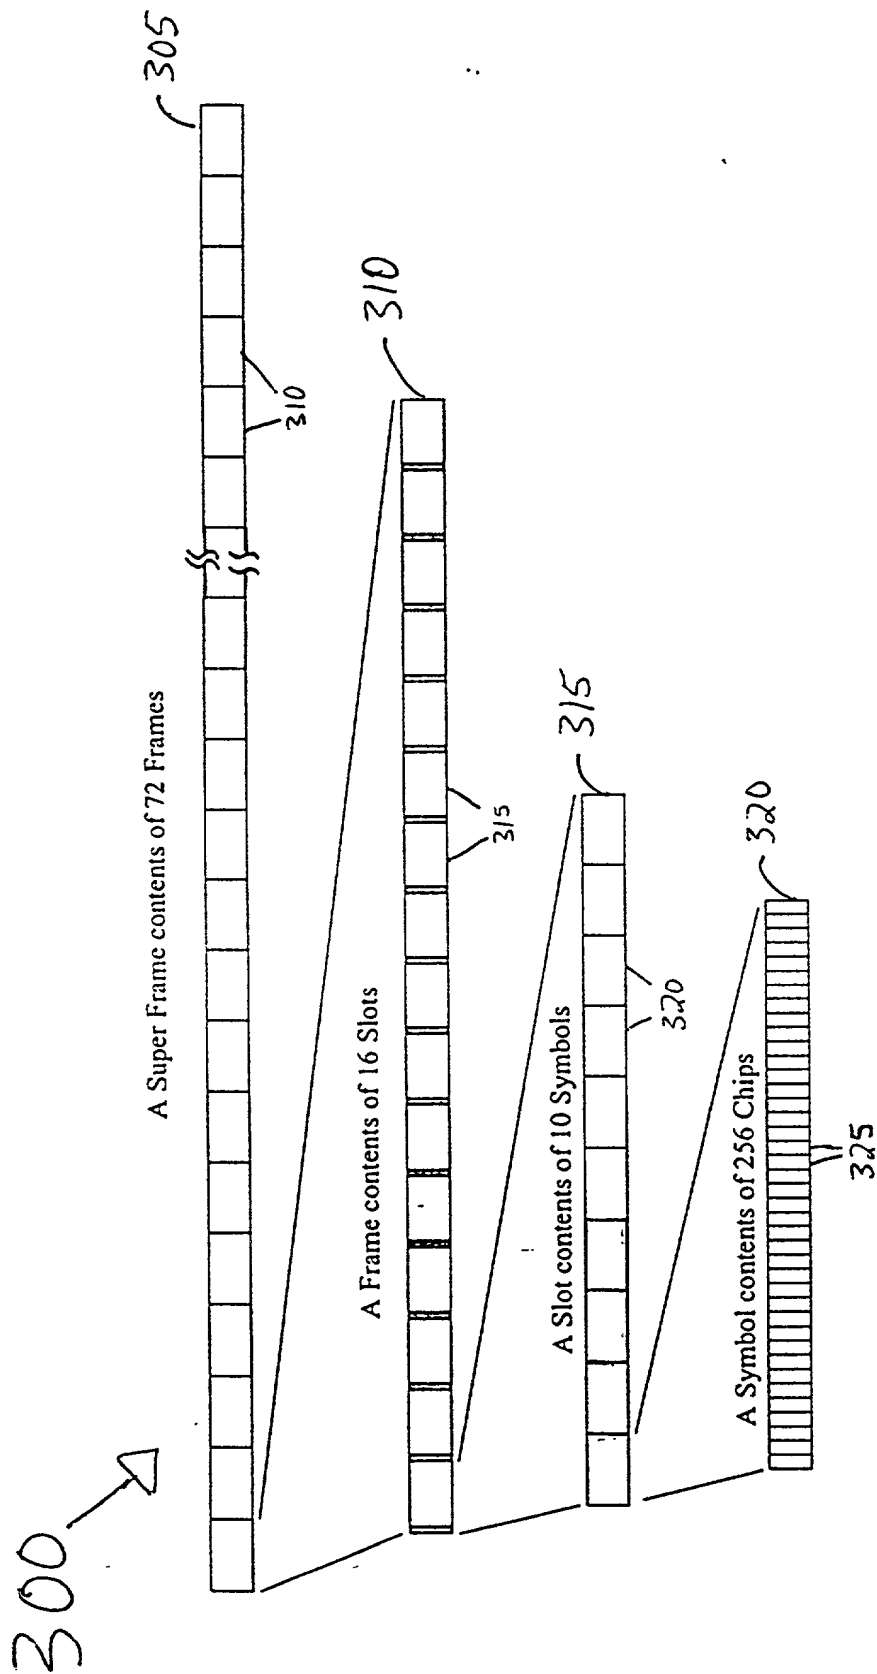


FIG. 3

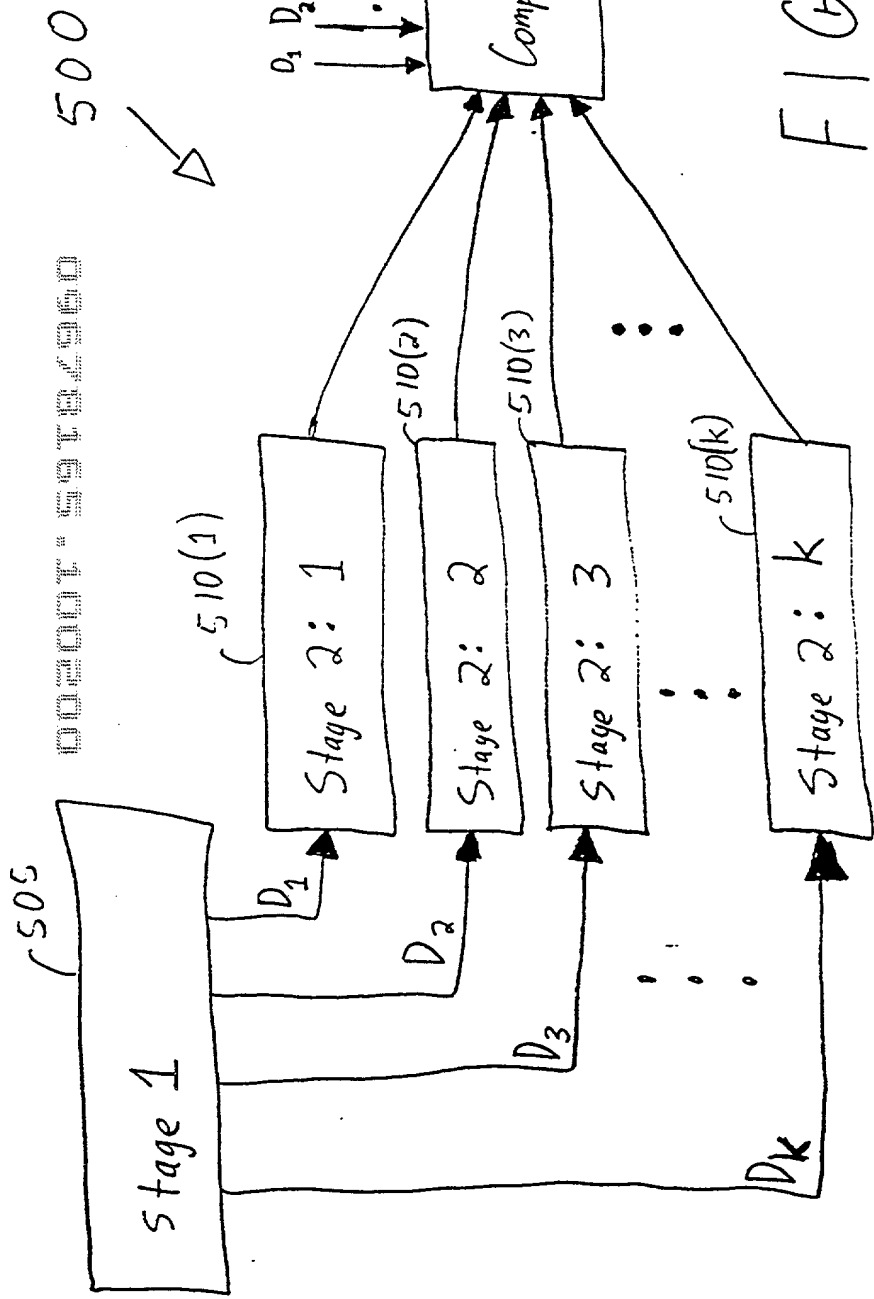


FIG. 5A

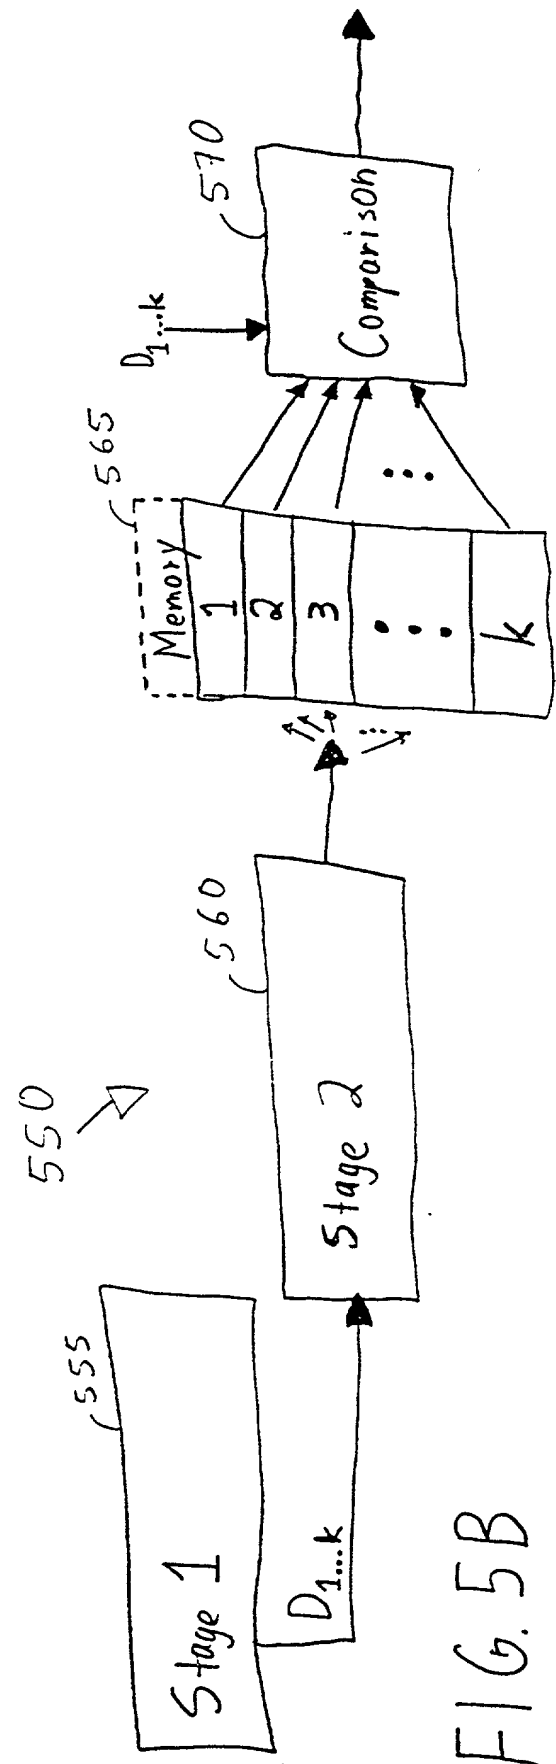


FIG. 5B

600
↓

002001 5913 960

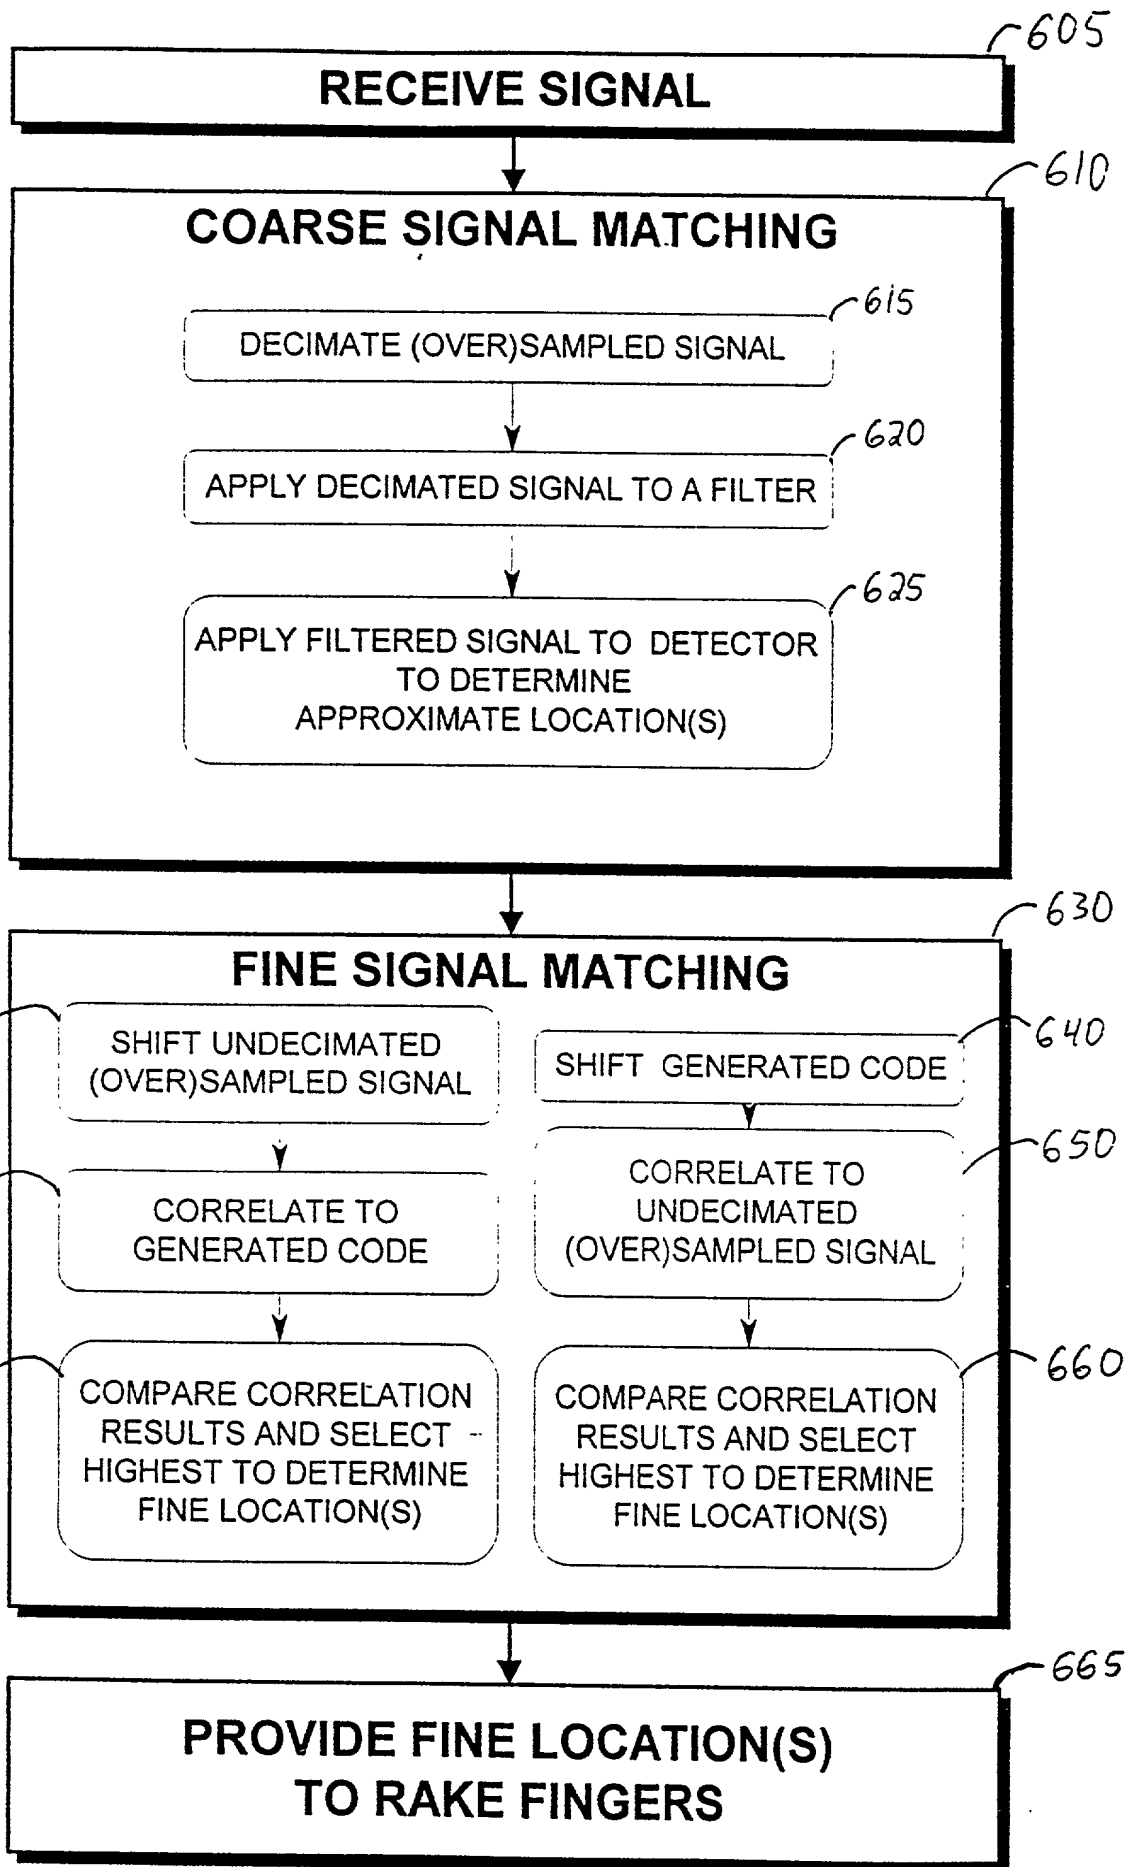


FIG. 6

RULES 63 AND 67 (37 C.F.R. 1.63 and 1.67)
DECLARATION AND POWER OF ATTORNEY

FOR UTILITY/DESIGN/CIP/PCT NATIONAL APPLICATIONS

As a below named inventor, I hereby declare that:

My residence, post office address and citizenship are as stated below next to my name; and

I believe that I am the original, first and sole inventor (if only one name is listed below) or an original, first and joint inventor (if plural names are listed below) of the subject matter which is claimed and for which a patent is sought on the invention entitled: **SEARCHING FOR SIGNALS IN A COMMUNICATIONS SYSTEM**, the specification of which: (mark only one)

- X (a) is attached hereto.
 (b) was filed on _____ as Application Serial No. _____ and
was amended on _____ (if applicable).
 (c) was filed as PCT International Application No. PCT/ _____ on _____ and
was amended on _____ (if applicable).
 (d) was filed on _____ as Application Serial No. _____ and was
issued a Notice of Allowance on _____.
 (e) was filed on _____ and bearing attorney docket number _____.

I hereby state that I have reviewed and understand the contents of the above identified specification, including the claims as amended by any amendment referred to above or as allowed as indicated above.

I acknowledge the duty to disclose all information known to me to be material to the patentability of this application as defined in 37 CFR § 1.56. If this is a continuation-in-part (CIP) application, insofar as the subject matter of each of the claims of this application is not disclosed in the prior United States application in the manner provided by the first paragraph of 35 U.S.C. § 112, I acknowledge the duty to disclose to the Office all information known to me to be material to patentability of the application as defined in 37 CFR § 1.56 which became available between the filing date of the prior application and the national or PCT international filing date of this CIP application.

I hereby claim foreign priority benefits under 35 U.S.C. § 119/365 of any foreign application(s) for patent or inventor's certificate listed below and have also identified below any foreign application for patent or inventor's certificate filed by me or my assignee disclosing the subject matter claimed in this application and having a filing date (1) before that of the application

on which my priority is claimed or, (2) if no priority is claimed, before the filing date of this application:

PRIOR FOREIGN PATENTS

<u>Number</u>	<u>Country</u>	<u>Month/Day/Year Filed</u>	<u>Date first laid-open or Published</u>	<u>Date patented or Granted</u>	<u>Priority Claimed</u>	
					<u>Yes</u>	<u>No</u>
_____	_____	_____	_____	_____	_____	_____
_____	_____	_____	_____	_____	_____	_____

I hereby claim the benefit under 35 U.S.C. § 120/365 of any United States application(s) listed below and PCT international applications listed above or below:

PRIOR U.S. OR PCT APPLICATIONS

Application No. (series code/serial no.) Month/Day/Year Filed Status(pending, abandoned, patented)

I hereby appoint:

TIMOTHY G. ACKERMANN, Reg. No. 44,493
 THOMAS E. ANDERSON, Reg. No. 37,063
 BENJAMIN J. BAI, Reg. No. 43,481
 MICHAEL J. BLANKSTEIN, Reg. No. 37,097
 MARY JO BOLDINGH, Reg. No. 34,713
 MARGARET A. BOULWARE, Reg. No. 28,708
 ARTHUR J. BRADY, Reg. No. 42,356
 MATTHEW O. BRADY, Reg. No. 44,554
 DANIEL J. BURNHAM, Reg. No. 39,618
 THOMAS L. CANTRELL, Reg. No. 20,849
 RONALD B. COOLLEY, Reg. No. 27,187
 THOMAS L. CRISMAN, Reg. No. 24,846
 STUART D. DWORK, Reg. No. 31,103
 WILLIAM F. ESSER, Reg. No. 38,053
 ROGER J. FRENCH, Reg. No. 27,786
 JANET M. GARETTO, Reg. No. 42,568
 JOHN C. GATZ, Reg. No. 41,774
 RUSSELL J. GENET, Reg. No. 42,571

J. KEVIN GRAY, Reg. No. 37,141
 STEVEN R. GREENFIELD, Reg. No. 38,166
 J. PAT HEPTIG, Reg. No. 40,643
 SHARON A. ISRAEL, Reg. No. 41,867
 JOHN R. KIRK JR., Reg. No. 24,477
 PAUL R. KITCH, Reg. No. 38,206
 TIMOTHY M. KOWALSKI, Reg. No. 44,192
 HSIN-WEI LUANG, Reg. No. 44,213
 JAMES F. LEA III, Reg. No. 41,143
 ROBERT W. MASON, Reg. No. 42,848
 ROGER L. MAXWELL, Reg. No. 31,855
 ROBERT A. McFALL, Reg. No. 28,968
 STEVEN T. McDONALD, Reg. No. 45,999
 LISA H. MEYERHOFF, Reg. No. 36,869
 STANLEY R. MOORE, Reg. No. 26,958
 RICHARD J. MOURA, Reg. No. 34,883
 MARK V. MULLER, Reg. No. 37,509
 P. WESTON MUSSELMAN JR. Reg. No. 31,644
 DANIEL G. NGUYEN, Reg. No. 42,933
 SPENCER C. PATTERSON, Reg. No. 43,849

RUSSELL N. RIPPAMONTI, Reg. No. 39,521
 STEPHEN G. RUDISILL, Reg. No. 20,087
 HOLLY L. RUDNICK, Reg. No. 43,065
 J.L. JENNIE SALAZAR, Reg. No. 45,065
 KEITH W. SAUNDERS, Reg. No. 41,462
 JERRY R. SELINGER, Reg. No. 26,582
 GARY B. SOLOMON, Reg. No. 44,347
 STEVE Z. SZCZEPANSKI, Reg. No. 27,957
 ANDRE M. SZUWALSKI, Reg. No. 35,701
 ALAN R. THIELE, Reg. No. 30,694
 TAMSEN VALOIR, Reg. No. 41,417
 RAYMOND VAN DYKE, Reg. No. 34,746
 BRIAN D. WALKER, Reg. No. 37,751
 GERALD T. WELCH, Reg. No. 30,332
 HAROLD N. WELLS, Reg. No. 26,044
 WILLIAM D. WIESE, Reg. No. 45,217

all of the firm of **JENKENS & GILCHRIST, P.C.**, 3200 Fountain Place, 1445 Ross Avenue, Dallas, Texas 75202-2799, as my attorneys and/or agents, with full power of substitution and revocation, to prosecute this application, provisionals thereof, continuations, continuations-in-part, divisionals, appeals, reissues, substitutions, and extensions thereof and to transact all business in the United States Patent and Trademark Office connected therewith, to appoint any individuals under an associate power of attorney and to file and prosecute any international patent application filed thereon before any international authorities, and I hereby authorize them to act and rely on

00678165 "100200"

instructions from and communicate directly with the person/assignee/attorney/firm/organization who/which first sent this case to them and by whom/which I hereby declare that I have consented after full disclosure to be represented unless/until I instruct them in writing to the contrary.

Please address all correspondence and direct all telephone calls to:

Keith W. Saunders
Jenkins & Gilchrist, P.C.
3200 Fountain Place
1445 Ross Avenue
Dallas, Texas 75202-2799
214/855-4732
214/855-4300 (fax)

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code, and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.

NAMED INVENTOR(S)

1	Roozbeh Atarius		
	Full Name	Inventor's Signature	Date
	Musikantvägen 8b 224 68 Lund Sweden		Swedish
	Residence (city, state, country)		Citizenship
	Musikantvägen 8b 224 68 Lund Sweden		
	Post Office Address (include zip code)		

2	Håkan Eriksson		
	Full Name	Inventor's Signature	Date
	Iliongränd 35 224 72 Lund Sweden		Swedish
	Residence (city, state, country)		Citizenship
	Iliongränd 35 224 72 Lund Sweden		
	Post Office Address (include zip code)		

3	Torgny Palenius		
	Full Name	Inventor's Signature	Date
	Svalörtsvägen 10 246 50 Löddeköpinge Sweden		Swedish
	Residence (city, state, country)		Citizenship
	Svalörtsvägen 10 246 50 Löddeköpinge Sweden		
	Post Office Address (include zip code)		

Dallas2 716189 v 1, 34650.00443USPT

	Torsten Carlsson		
	Full Name	Inventor's Signature	Date
5	Viborgsslingan 46 224 72 Lund Sweden		Swedish
	Residence (city, state, country)		Citizenship
	Viborgsslingan 46 224 72 Lund Sweden		
	Post Office Address (include zip code)		

6	Kjell Gustafsson		
	Full Name	Inventor's Signature	Date
	Borgåslingen 2 224 72 Lund Sweden		Swedish
	Residence (city, state, country)		Citizenship
	Borgåslingen 2 224 72 Lund Sweden		
	Post Office Address (include zip code)		